




GRABO


# SILVER KNIGHT WALL

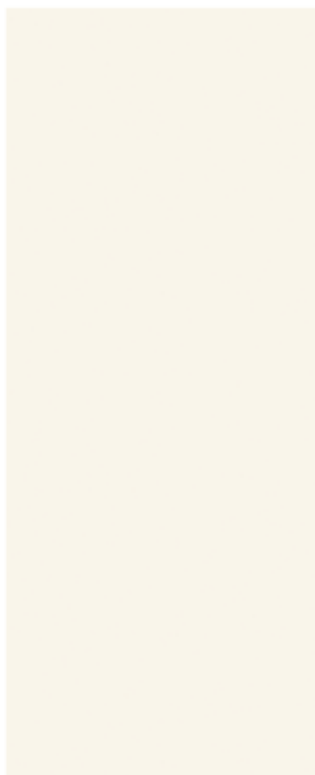

1001-275



1217-275

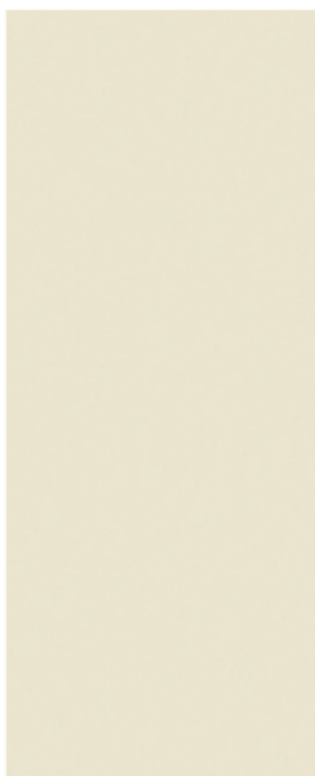

1137-275



2258-275



7089-275



6030-275



# GRABO

## SILVER KNIGHT WALL



### SILVER KNIGHT

The *most hygienical* vinyl sheet flooring and wall covering

Total thickness  
**1.5 mm**

Thickness of wear layer  
**0.2 mm**

Total weight  
**1.5 kg/m<sup>2</sup>**

### SPECIFICATIONS

CONSTRUCTION	STANDARDS	SILVER KNIGHT WALL
DESCRIPTION		
Construction	heterogeneous wall covering	
Total thickness	EN ISO 24346	1.5 mm
Wear layer thickness	EN ISO 24340	0.2 mm
Width of roll	EN ISO 24341	1.5 m
Length of rolls	EN ISO 24341	25 lm
Total weight	EN ISO 23997	1.5 kg/m <sup>2</sup>
Residual indentation	EN ISO 24343	max 0.35 mm
Dimensional stability	EN ISO 23999	max 0.2 %
Light fastness	EN ISO 105-B02	grade 6
Abrasion group	MSZ EN 660-1	T
Chemical resistance	EN ISO 26987	✓
Surface treatment	TechSurface	
Anti-bacterial and fungicid treatment	Silver Knight	
Environmental attributes	Phthalate-, Solvent- and Heavy metal free product	

### PERFORMANCE FEATURES & BENEFITS

- Eliminates harmful pathogens without chemicals
- Flexibility
- Dimensionally stable

### RECOMMENDED USAGE

- Healthcare
- Education
- Retail

### ENVIRONMENTAL ATTRIBUTES

- 100% recyclable
- Phthalate, solvent and heavy metal free
- NO WAX
- Sustainable maintenance

## Ecological Formula




# > 99%

## BACTERIA DESTROYED

### CONSTRUCTION

- 1 Silver Knight Tech Surface Wear layer
- 4 Glass fibre reinforcement
- 5 Foam backing

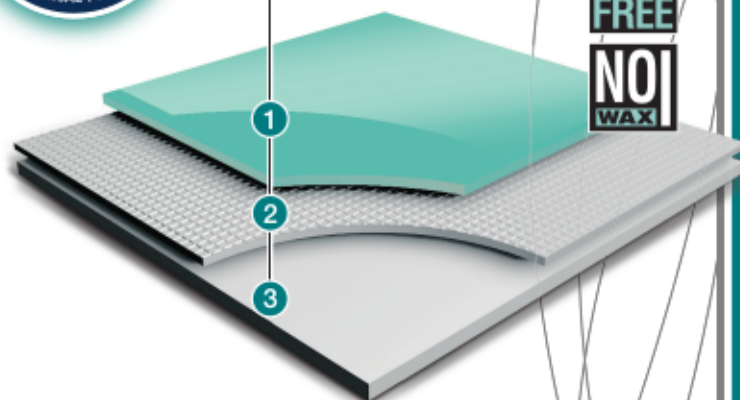

### GRABOPLAST

Floor Covering Manufacturers Ltd.

H-9023 Győr, Fehérvári út. 16/b. Telefon: (+36) 96 506-100

[www.graboplast.com](http://www.graboplast.com)



[www.facebook.com/graboplast](https://www.facebook.com/graboplast)