




GRABO

GRABIMED C/F

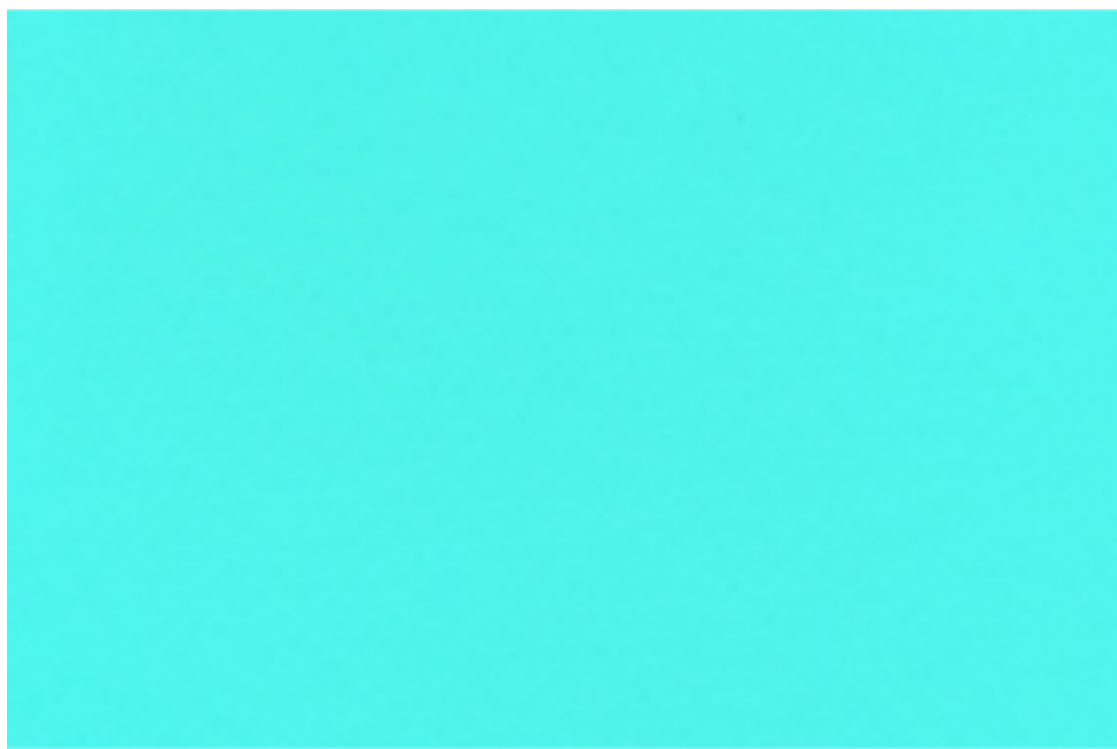

7106-00-47-00





GRABO

## GRABIMED C/F



## SPECIFICATIONS

| CONSTRUCTION                      | STANDARDS                            | GRABIMED C/F         |
|-----------------------------------|--------------------------------------|----------------------|
| DESCRIPTION                       |                                      |                      |
| Construction                      | flame resistant mattress protector   |                      |
| Weight                            | EN ISO 2286                          | 260 g/m <sup>2</sup> |
| Tensile strength - length         | ISO 1421B                            | 220 N/50 mm          |
| Tensile strength - cross          | ISO 1421B                            | 110 N/50 mm          |
| Tear strength - length            | ISO 4674 A2                          | 15 N                 |
| Tear strength - cross             | ISO 4674 A2                          | 15 N                 |
| Coating adhesion - length         | ISO 2411                             | 30 N/50 mm           |
| Coating adhesion - cross          | ISO 2411                             | 30 N/50 mm           |
| Flexibility                       | ISO 7854A                            | 200 / 1000 cycles    |
| Colour fastness grade to light    | EN ISO 105-B02                       | grade 5              |
| Colour fastness grade dry rubbing | ISO 105 X12                          | grade 3              |
| Colour fastness grade wet rubbing | ISO 105 X12                          | grade 3              |
| Cold resistance at - 15 °C        | ISO 4675                             | no breaking off      |
| Waterproofness                    | ISO 811                              | 19,6 kPa             |
| Flame propagation                 | ISO 3795                             | 100 mm/min           |
| Environmental attributes          | Solvent and heavy metal free product |                      |

PERFORMANCE  
FEATURES & BENEFITS

- Waterproof
- Easy cleaning, can be washed up to 90°C
- Self-extinguish
- Chemical resistant

RECOMMENDED  
USAGE

- Hospitals
- Social institutions
- Home care

ENVIRONMENTAL  
ATTRIBUTES

- 100% recyclable
- Solvent and heavy metal free
- Sustainable maintenance

Ecological  
Formula**GRABOPLAST**

Floor Covering Manufacturers Ltd.

H-9023 Győr, Fehérvári út. 16/b. Telefon: (+36) 96 506-100

[www.graboplast.com](http://www.graboplast.com)[www.facebook.com/graboplast](https://www.facebook.com/graboplast)



## GRABIMED C/F

| Technical parameters                | Standard       | Unit                                                                                                                                                                      | Result                                            |
|-------------------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| Construction                        |                |                                                                                                                                                                           | flame resistant mattress protector                |
| Weight                              | ISO 2286       | g/m <sup>2</sup>                                                                                                                                                          | 260                                               |
| Tensile strength - length           | ISO 1421B      | N/50 mm                                                                                                                                                                   | 220                                               |
| Tensile strength - cross            | ISO 1421B      | N/50 mm                                                                                                                                                                   | 110                                               |
| Tear strength - length              | ISO 4674 A2    | N                                                                                                                                                                         | 15                                                |
| Tear strength - cross               | ISO 4674 A2    | N                                                                                                                                                                         | 15                                                |
| Coating adhesion - length           | ISO 2411       | N/50 mm                                                                                                                                                                   | 30                                                |
| Coating adhesion - cross            | ISO 2411       | N/50 mm                                                                                                                                                                   | 30                                                |
| Flexibility                         | ISO 7854A      | 1000 cycles                                                                                                                                                               | 200                                               |
| Colour fastness grade - to light    | EN ISO 105-B02 |                                                                                                                                                                           | 5                                                 |
| Colour fastness grade - dry rubbing | ISO 105 X12    |                                                                                                                                                                           | 3                                                 |
| Colour fastness grade - wet rubbing | ISO 105 X12    |                                                                                                                                                                           | 3                                                 |
| Cold resistance at -15 C            | ISO 4675       |                                                                                                                                                                           | no breaking off                                   |
| Waterproofness                      | ISO 811        | kPa                                                                                                                                                                       | 16,6                                              |
| Flame propagation                   | ISO 3795       | mm/min                                                                                                                                                                    | 100                                               |
| Environmental attributes            |                |   | Phthalate-, Solvent- and Heavy metal free product |

**GRABOPLAST Floor Covering Manufacturers Ltd.**  
H-9023 Győr, Fehérvári út 16/b tel.: (36) 96 506 100  
mail@graboplast.hu www.graboplast.hu